



INSTALL CONFIDENCE



ALTAIR HIGH WALL INVERTER R-410A 60HZ COOLING ONLY

YHJE 12 to 24 ZJ6AXBORX

A complete range from 3.5kW to 6.7kW

## ALTAIR HIGH WALL INVERTER R-410A 60HZ COOLING ONLY

### Indoor Unit



- Modern, compact design
- Efficient cooling
- Hidden display
- 3D Air Flow (Option)
- WIFI (Option)

### Remote Control

- 4 operation modes
- Sleep mode and on/off timers
- Turbo cool settings

### Condensing Unit

- Fashion appearance
- Convenient installation
- Easy maintenance

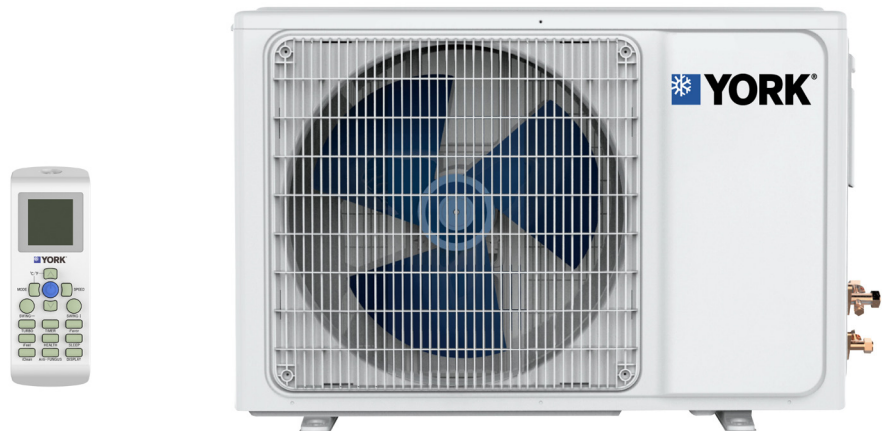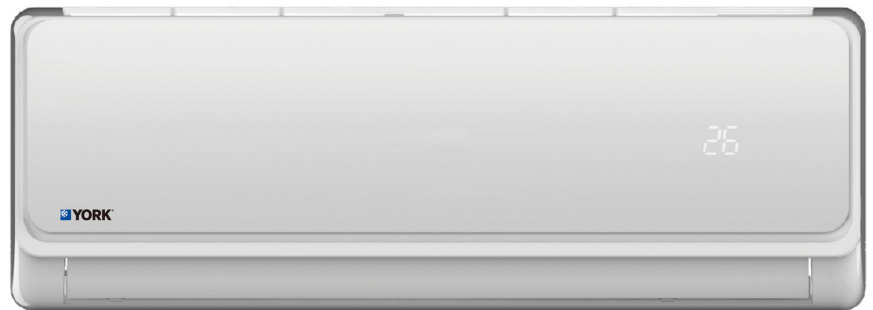

The YORK® line of High Wall Air Conditioners includes a wide range of sizes to give you more flexibility in your product offering. Each model is designed to provide comfort and efficiency, in an easy-to-operate unit and the sleek design fits a variety of spaces, whether it's in a home or office. Models meet the highest energy efficiency ratings, so less energy is consumed without sacrificing comfort and performance. Both the condensing and indoor units are engineered for quiet operation. And comfort control settings are easily changed with the touch of a button on the remote control.

## ALTAIR HIGH WALL INVERTER R-410A 60HZ COOLING ONLY

### Features and Benefits



#### DC Inverter Compressor

DC inverter compressor provides more comfortable indoor environment, higher performance in partial load and better heating performance in low ambient temperature than fixed compressor.



#### R-410A

Environmentally-friendly refrigerant cools and heats more efficiently without destroying the ozone layer.



#### Turbo Mode

Provides quicker cooling with one press of the remote button.



#### 24-Hour Timer

Allows programmed start times up to 24 hours in advance for flexible and more convenient operation.



#### Multi-Speed Fan

Multi-speed fan helps satisfy various airflow requirements.



#### Self Diagnosis

Clearly displayed failure codes allow for quicker troubleshooting and easier maintenance.



#### 3-Minute Protection

A 3-minute delay before the compressor will restart helps avoid compressor damage and work time.



#### WIFI Control (Option)

Controls air conditioner with Smart phone or tablet through Internet.

### Inner Groove Copper Tube

Inner groove copper tubing allows more refrigerant to pass through, improving heat exchange by 30 to 50% when compared to traditional copper tubing, and lowering power consumption while keeping output capacity at the same level.



## Specification

York Set Model		YHJE12ZJ6AXBORX	YHJE18ZJ6AXBORX	YHJE24ZJ6AXBORX	
York Outdoor Model		YHJE12YJ6AXBO-X	YHJE18YJ6AXBO-X	YHJE24YJ6AXBO-X	
York Indoor Model		YHJE12XJ6AXB-RX	YHJE18XJ6AXB-RX	YHJE24XJ6AXB-RX	
Power supply	V/Ph/Hz	208~230V/1Ph/60Hz	208~230V/1Ph/60Hz	208~230V/1Ph/60Hz	
Power supply in		Outdoor unit	Outdoor unit	Outdoor unit	
Cooling	Capacity(Min~Max)	Btu/h	12,000(2,729-12,966)	18,000(4,094-18,425)	23,000(4,776-24,567)
	Power Input(Min~Max)	W	1,250(100-1,500)	2,030(200-2,200)	2,360(200-2,800)
	Current Rated(Min~Max)	A	5.5(0.5-8.0)	9.0(1.0-10.6)	10.7(1.0-13.0)
	SEER	Btu/h·W	16.0	16.0	16.0
	EER	Btu/h·W	9.6	8.8	9.8
Moisture Removal	l/h	0.7	1.1	1.4	
Max. input consumption	W	1,500	2,200	2,800	
Max. current	A	8.0	10.6	13.0	
Indoor fan motor	Power Output	W	18	30	50
	Capacitor	µF	1.5	3	3
	Speed (SH/H/M/L)	rpm	1,280/1,130/1,000/850	1,230/1,080/990/900	1,300/1,150/1,000/850
Indoor air flow (SH/H/M/L)	m <sup>3</sup> /h	600/470/400/350	850/720/650/550	1,250/1,100/950/750	
Indoor noise level (SH/H/M/L)	dB(A)	42/37/32/28	46/41/38/34	51/46/42/37	
Indoor dimension	Unit (WxHxD)	mm	750×285×200	900×310×225	1,082×330×233
	Packing (WxHxD)	mm	800×345×265	950×380×290	1,130×395×300
Indoor weight	Net	kg	8	12	13.5
	Gross	kg	10	14	17
Compressor	Type		Rotary	Rotary	Rotary
	Capacity	W	3,260	4,050	4,470
	Power Input	W	825	1,025	1,145
	Rated current(RLA)	A	5.8	7.25	7.95
	Refrigerant oil	ml	ESTER OIL VG74 370	ESTER OIL VG74 450	ESTER OIL VG74 500
Outdoor fan motor	Power Output	W	24	40	65
	Capacitor	µF	NA (DC Inverter)	NA (DC Inverter)	NA (DC Inverter)
	Speed	rpm	850	900	870
Outdoor air flow	m <sup>3</sup> /h	1,860	2,100	2,800	
Outdoor noise level	dB(A)	52	54	56	
Outdoor dimension	Unit (WxHxD)	mm	730×545×285	795×525×290	825×655×310
	Packing (WxHxD)	mm	850×620×370	920×620×400	932×759×412
Outdoor weight	Net	kg	25.5	32	40
	Gross	kg	29.5	37	44.5
Refrigerant	Type		R-410A	R-410A	R-410A
	Charge	g	820	1,100	1,420
Refrigerant pipe	Liquid side	∅ mm	6.35	6.35	6.35
	Gas side	∅ mm	12.7	12.7	15.88
	Max. refrigerant pipe length	m	15	15	15
	Max. difference in level	m	10	10	10
	Add refrigerant quantity per meter	g	20x(Length-5)	30x(Length-5)	30x(Length-5)
Operation temperature range	°C	16-32	16-32	16-32	
Ambient temperature range	°C	-5-43	-5-43	-5-43	
Application area	m <sup>2</sup>	12-20	17-34	23-47	
Qty'per 20' & 40' & 40HQ	Set	101/219/250	79/174/201	59/130/144	

### Nominal testing conditions:

Cooling - Indoor 80.6°F DB / 66.2°F WB (27°C DB / 19°C WB) & Outdoor 95°F DB / 75.2°F WB (35°C DB / 24°C WB)

Heating - Indoor 68°F DB / 59°F WB (20°C DB / 15°C WB) & Outdoor 44.6°F DB / 42.8°F WB (7°C DB / 6°C WB)



INSTALL CONFIDENCE

Johnson Controls, the Johnson Controls logo, YORK are registered trademarks of Johnson Controls, Inc in the United States of America and other countries. Other trademarks used herein may be trademarks or registered trademarks of other companies.

FOR MORE INFORMATION CONTACT [JOHNSONCONTROLS.COM](http://JOHNSONCONTROLS.COM)

© 2017 Johnson Controls, Inc, P.O. Box 423, Milwaukee, WI 53201, All rights reserved worldwide.

SHJEJ6AXBORX-171229